

DESCRIPTION

- Bidirectional wafer-design knife gate valve.
- “Monoblock” onepiece cast iron body.
- Stainless steel gate. Two rubber sleeves.
- Provides high flow rates with low pressure drop.
- Various seat materials available.
- Face-to-face dimension in accordance with **Val-ves** standard.

GENERAL APPLICATIONS

This knife gate valve is suitable for working in the mining industry, in loaded fluid transport lines, such as: water with stones, sludge, etc. and in general it is used for abrasive fluids in the chemical industry and waste water. Designed for the following applications:

Designed for the following applications :

- Thermal power stations
- Energy Sector
- Chemical plants
- Mining
- Sewage treatment

SIZES

DN50 a DN1500 (larger sizes on request).

WORKING PRESSURE (ΔP)

DN 50-600 = 10 bar 10Kg/cm²

DN 700-900 = 4 bar 6Kg/cm²

DN 1000-1500 = 2 bar 4Kg/cm²

The pressures indicated in the table, can be used in either of the valve's two directions. Other pressures on request.

FLANGE DRILL HOLE

DIN PN10 & ANSI B16.5 (150 LB)

OTHER COMMON FLANGES

DIN PN 6 Australian standard.

DIN PN 16 JIS standard.

DIN PN 25 British standard.

SERIE - GL



DIRECTIVES

- Pressure Equipment Directive:
(PED) ART.3 /CAT.1.
- De atmósferas explosivas:
Potential Explosive Atmospheres Directive

For further information on categories and zones please con-tact the Technical-Commercial Dept. **VALVES.*

QUALITY DOSSIER

All valves are tested hydrostatically at **Valves**, and material and test certificates can be provided.

- Body test = working pressure x 1,5
- Seat test = working pressure x 1,1

ADVANTAGE OF MODEL GL

This knife gate valve's main characteristic is that it provides a full continuous flow. This means that in open position it produces no cavities and there are no turbulences in the fluid. The GL valve's body is composed of one single "monoblock" piece.

The stem protection hood is independent from the handwheel securing nut, this means the hood can be disassembled without the need to release the handwheel. This advantage allows regular maintenance operations to be performed, such as lubricating the stem.

The stem on the **Valves** valve is made of 18/8 stainless steel. This is another added advantage, as some manufacturers produce it with 13% chrome and it gets rusty very quickly.

The handwheel is made of GJS-500 nodular cast iron. Some manufacturers produce them in normal cast iron which can lead to breakages in the event of very high operating torque or knocks.


The yoke is has a compact design with the bronze actuator nut protected in a sealed and lubricated box. This makes it possible to move the valve with a key, even without the handwheel (in other manufacturers' products this is not possible).

The pneumatic actuator's upper and lower covers are made of GJS-500 nodular cast iron, making them highly shock resistant. This characteristic is essential in pneumatic actuators.

The pneumatic cylinder's o-ring seals are commercial products and can be purchased worldwide. This means it is not necessary to contact **Valves** every time a seal is required.

STANDARD COMPONENTS LIST

COMPONENT	VERSION H° F°	STAINLESS STEEL
1 Body	GJS-500	CF8M
2 Gate	AISI304	AISI316
3 Packing gland	STEEL	AISI316
4 Packing seal.	NATURAL RUBBER	
5 Packing	GREASED PACK	
6 Lower Cover	STEEL	AISI316
7 Sleeve	NATURAL RUBBER	
8 Support plates	STEEL	ACERO
9 Stem	AISI303	AISI303
10 Yoke	GJS-500	GJS-500
11 Stem nut	BRONZE	BRONCE
12 Handwheel	GJS-500	GJS-500
13 Stop nut	STEEL	ACERO
14 Hood nut	5.6 ZINC	5.6 ZINC
15 Hood	STEEL	ACERO
16 Protec. cap	PLASTIC	PLASTICO
17 Greaser (optional)	STEEL	ACERO

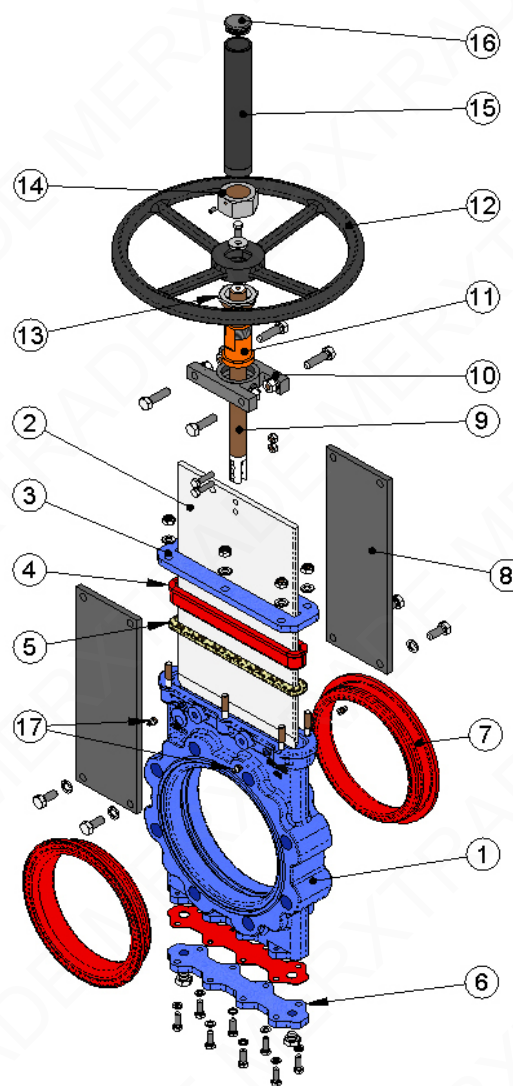

Note: The image numbers refer to the list of components in the table.

DESIGN CHARACTERISTICS

1. BODY

One piece reinforced cast iron body. The body provides a full continuous flow. This means that in open position it produces no cavities and, therefore, there are no turbulences in the fluid and the load loss is minimal. For diameters greater than DN600 the body is machine-welded with the necessary reinforcements to resist the maximum working pressure. Full port designed to provide high flow rates with low pressure drop. The body's internal design prevents any build up of solids in the seat area. The standard manufacturing materials are GJS-500 and CF8M stainless steel. Other materials such as: A216WCB carbon steel and stainless steel alloys (AISI316Ti, Duplex, 254SMO, Uranus B6, Ni-Resist, Ductile Ni-Resist, ...) are available on request. As standard, iron or carbon steel valves are painted with an anti-corrosive protection of 80 microns of EPOXY (colour RAL 5015). Other types of anti-corrosive protections are available on request.

2. GATE


The standard manufacturing materials are AISI304 stainless steel in valves with GJS-500 body and AISI316 stainless steel in valves with CF8M body. Other materials or combinations can be supplied on request. The gate is polished on both sides to provide a smooth contact surface with the resilient seat. At the same time, the sharp edges on the gate are rounded to prevent the seal from being cut. There are different degrees of polishing, anti-abrasion treatments and various options to adapt the valves to the customer's requirements.

3. SEAT (watertight)

The seat on the GL valve is composed of two rubber sleeves, located on either side of the body symmetrically.

The sleeves are made of natural rubber with a metal core which helps to keep their shape and at the same time prevents deformations. Whilst the valve is in open position, the sleeves' elasticity ensures they are joined together permanently, preventing the accumulation of solids between the two parts of the body.

The GL valve is designed for abrasive fluids, and therefore, the sleeves protect the entire surface of the body which would be exposed to the abrasive flow. Regarding the sleeves' maintenance, these can be replaced from outside of the valve, making operation easier. It is a seat with two symmetrical parts, below we show a diagram of the seat

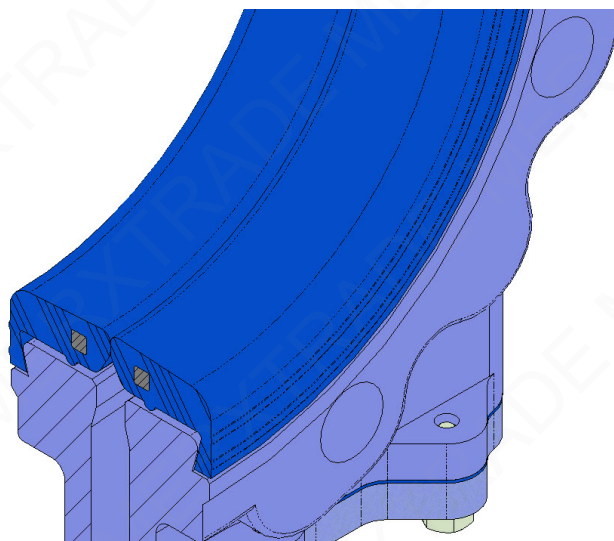

RESILIENT SEAT MATERIALS

NATURAL RUBBER

This is the standard resilient seat fitted on **Valves GL model** valves. It can be used in multiple applications at temperatures no higher than 90°C with abrasive products and it provides the valve with 100% watertight integrity. Application: fluids in general.

EPDM

Recommended for temperatures no higher than 90°C*, it provides the valve with 100% watertight integrity. Application: water and acids.

NITRILE

It is used in fluids containing fats or oils at temperatures no higher than 90°C*. It provides the valve with 100% watertight integrity.

VITON

Suitable for corrosive applications and continuous high temperatures of up to 190°C and peaks of 210°C. It provides the valve with 100% watertight integrity.

SEATS/SEALS

MATERIAL	T° MÁX (°C)	APLICACIONES
Natural rubber	90	General
EPDM (E)	90*	Water, non mineral acids and oils
Nitrilo (N)	90*	Hydrocarbons, oils and greases
Vitón (V)	200	Hydrocarbons and solvents

4. PACKING

Standard packing is composed of a specially designed EPDM O-ring which provides watertight integrity between the body and the gate, preventing any type of leakage to the atmosphere. It also has a greased packing strip to help the valve's operation during the opening and closing functions. They are located in an easily accessible place and can be replaced without dismantling the valve from the pipeline.

5. STEM

The stem on the **Valves** is made of 18/8 stainless steel. This characteristic provides high resistance and excellent corrosion-resistant properties. The valve design can be rising stem or non-rising stem. When a rising stem is required for the valve a stem hood is supplied to protect the stem from contact with dust and dirt, besides keeping it lubricated.

6. PACKING GLAND

The packing gland allows uniform force and pressure to be applied to the packing to ensure watertight integrity. As standard, valves with steel body include steel packing glands, whilst valves with stainless steel body have stainless steel packing glands.

7. ACTUATORS

All types of actuators can be supplied, with the advantage that the design is fully interchangeable. This design allows the customer to change the actuators themselves and no extra assembly accessories are required. A design characteristic of **Valves** is that all actuators are interchangeable.

Manual Actuators

Handwheel with rising stem / non-rising
Lever / Chainwheel
Gearbox / Others (square nut)

Accessories Available

Mechanical stops
Locking devices
Emergency manual actuators
Solenoid valves
Positioners
Limit switches
Proximity switches
Straight floor stand (Fig. 2)
Leaning floor stand (Fig. 1)

Automatic

Electric actuator
Pneumatic cylinder
Hydraulic cylinder




Fig.1






Fig.2


Stem extensions have also been developed, allowing the actuator to be located far away from the valve, to suit all needs. Please consult our technicians beforehand.

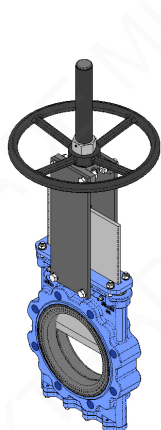


Handwheel with rising stem




Pneumatic actuator

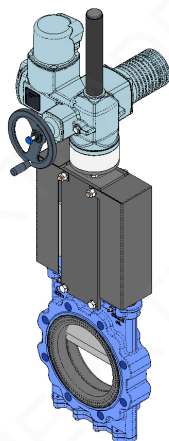

Electric motor actuator

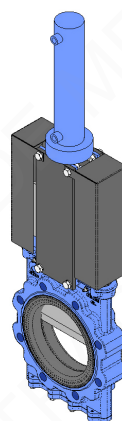

Hydraulic actuator

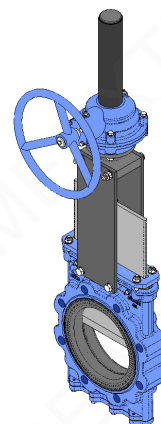

Handwheel Gear box

OPTIONS AND ACCESSORIES

Different accessories are available to adapt the valve to specific working conditions such as:

MIRROR POLISHED GATE

The mirror polished gate is especially recommended in the food industry and, as standard, in applications in which solids can stick to the gate. It is an alternative to ensure the solids slide off and do not stick to the gate.

PTFE LINED GATE

As with the mirror polished gate, it improves the valve's resistance to products that can stick to the gate.

STELLITED GATE

Stellite is added to the gate's internal circle to protect it from abrasion.

SCRAPER IN THE PACKING

Its function is to clean the gate during the opening movement and prevent possible damage to the packing.

HEATING JACKET

Recommended in applications in which the fluid can harden and solidify inside the valve's body. An external jacket keeps the body temperature constant, preventing the fluid from solidifying.

FLUSHING HOLES IN BODY

Several holes are drilled in the body to flush air, steam or other fluids out with the aim of cleaning the valve seat before sealing.

SOLENOID VALVES

Para distribución del aire a los accionamientos neumáticos.

CONNECTION BOXES, WIRING AND PNEUMATIC PIPING

Units supplied fully assembled with all the necessary accessories.

MECHANICAL LIMIT SWITCHES, INDUCTIVE SWITCHES AND POSITIONERS

Allows the valve to be mechanically locked in a set position for long periods.

STROKE LIMITING MECHANICAL STOPS

They allow the stroke to be mechanically adjusted, limiting the valve's desired run.

LIMITADORES DE CARRERA MECÁNICOS (TOPES MECÁNICOS)

Permiten ajustar mecánicamente la carrera, limitando el recorrido de la válvula.

EMERGENCY MANUAL ACTUATOR (HAND WHEEL /GEAR BOX)

Allows manual operation of the valve in the event of power or air failure.

INTERCHANGEABLE ACTUATORS

All actuators are easily interchangeable.

ACTUATOR OR YOKE SUPPORT ACTUATOR OR YOKE SUPPORT

Made of EPOXY-coated steel (or stainless steel on request), its robust design gives it great rigidity in order to resist the most adverse operation conditions.



EPOXI COATING

All cast iron and carbon steel bodies and components are EPOXY coated, giving the valves great resistance to corrosion and an excellent finish.

Valves standard colour is blue, RAL-5015.


GATE SAFETY PROTECTION

In accordance with European Safety Standards ("EC" marking), automated valves are equipped with gate guards, to prevent any objects from being accidentally caught in the gate.

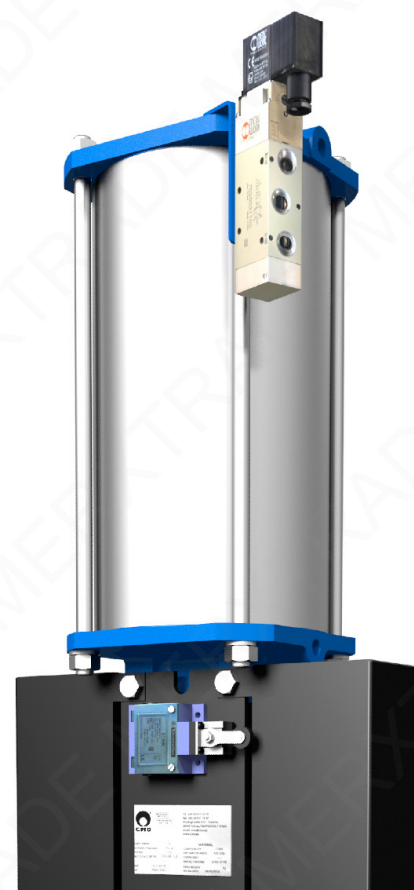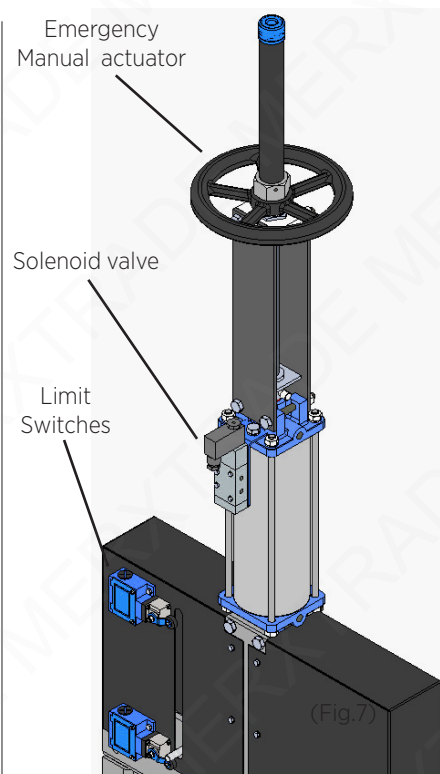

TYPES OF EXTENSION

When the valve needs to be operated from a distance, the following different types of actuators can be fitted:

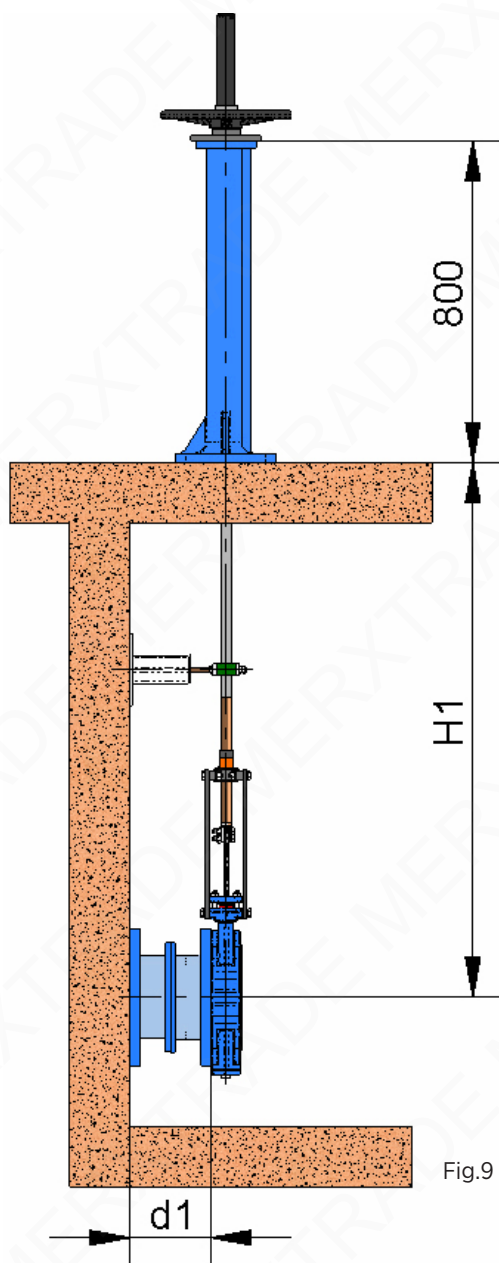

1.- EXTENSION: FLOOR STAND This extension is performed by coupling a rod to the stem. By defining the length of the rod, the desired extension is achieved. A floor stand is normally installed to support the actuator.

The definition variables are as follows:

H1: Distance from the valve's shaft to the base of the stand.

d1: Separation from the wall to the end of the connecting flange.

CHARACTERISTICS:

- It can be coupled to any type of actuator.
- A stem support-guide (Fig. 8) is recommended every 1.5m.
- The standard floor stand is 800mm high (Fig. 9). Other floor stand measurements available on request.
- A position indicator can be fitted to determine the valve's percentage of opening.
- Possibility of leaning floor stand (Fig. 10).

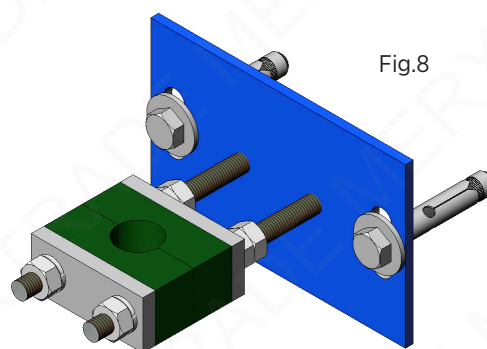


Fig.8

COMPONENTS LIST

COMPONENT	STANDARD VERSION
Steam	AISI 304
Rod	AISI 304
Support-Guide	EPOXI coated carbon steel
Gate / Guide	Nylon
Stand	EPOXI coated GJS 500

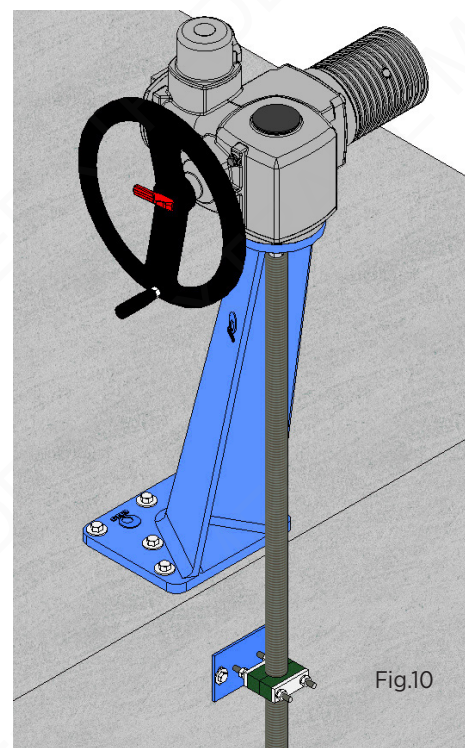


Fig.10

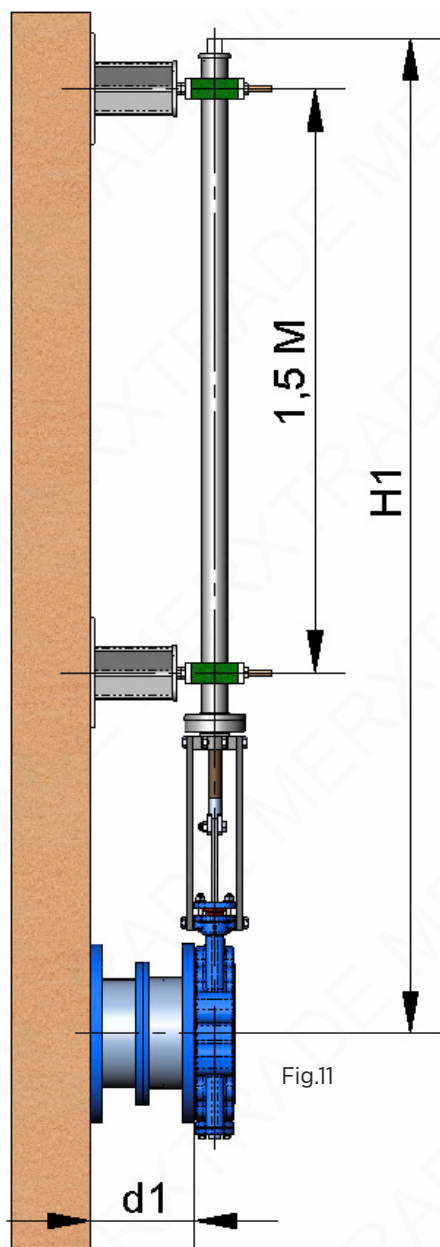


Fig.11

3.-EXTENSION:

EXTENDED SUPPORT PLATES (Fig 12)

When a short extension is required, it can be achieved by extending the support plates. An intermediate yoke can be fitted to reinforce the support plates' structure.

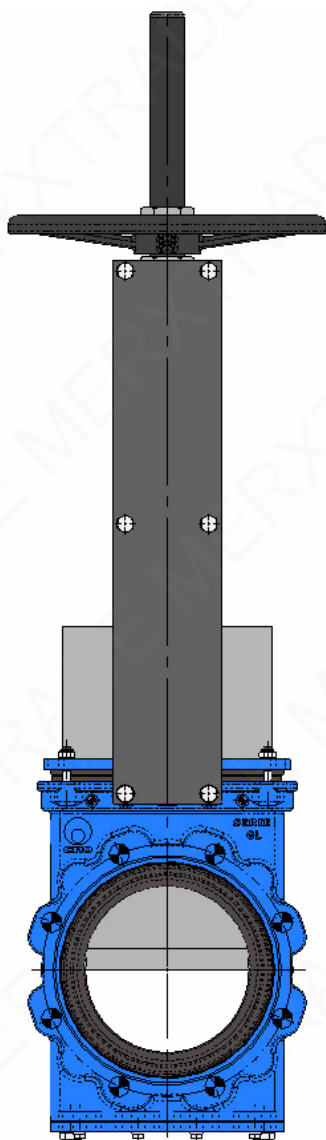


Fig.12

2.- EXTENSION: PIPE (Fig 11)

Consists of raising the actuator. The pipe will rotate in the same direction as the handwheel when the valve is operated but it always remains at the same height.

The definition variables are as follows:

H1: Distance from the valve's shaft to the desired height of the actuator.

d1: Separation from the wall to the end of the connecting flange.

CHARACTERISTICS:

- Standard actuators: Handwheel and "Square Nut"
- A pipe support-guide is recommended every 1.5m.
- The standard materials are: EPOXY coated carbon steel or stainless steel.

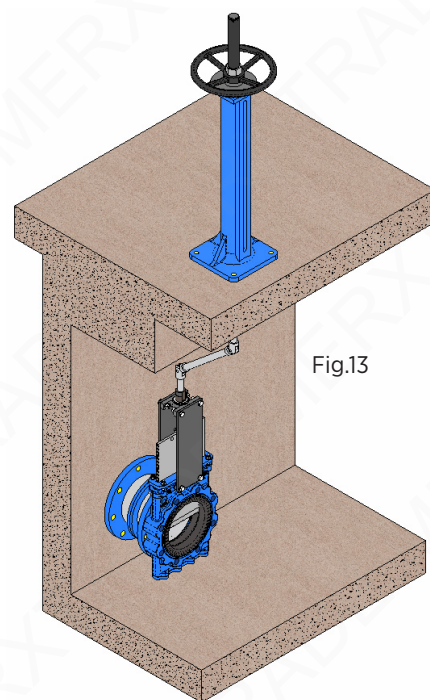


Fig.13

4.-EXTENSIÓN:

UNIVERSAL JOINT (Fig 13)

If the valve and the actuator are not in correct alignment, the problem can be resolved by fitting a universal joint.

HANDWHEEL WITH RISING STEM

The definition variables are as follows:

B = Max. width of the valve (without actuator).

P = Max. height of the valve (without actuator).

OPTIONS:

- Locking devices.
- Extensions: stand, pipe, plates.
- DN higher than those give in the table.


ACTUATOR INCLUDING:

- Handwheel
- Steam
- Nut
- Stem protection hood

AVAILABLE:

- Sandard DN50 a DN1000.
- Other DN on request.

- From DN350 (included) the actuator is with geared motor.
- Other pressures on request (ΔP)

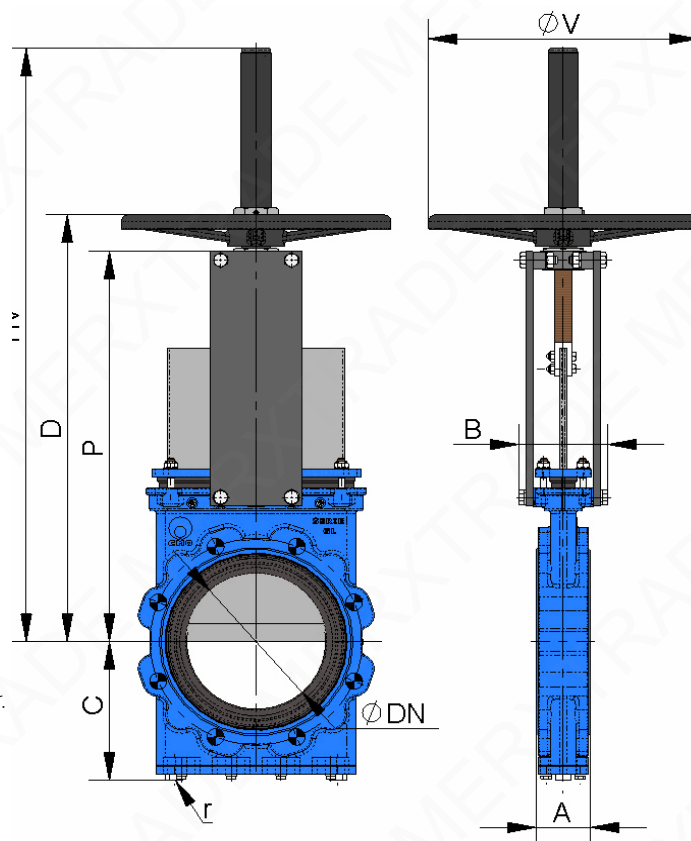

DN	ΔP (Kg/cm ²)	A	B	C	P	D	HV	øV	Kg.	r (B.S.P.)
50	10	175	109	106	280	319	449	225		1/4"
65	10	175	109	113	306	345	500	225		1/4"
80	10	175	109	122	332	372	551	225		1/4"
100	10	175	109	136	368	407	587	225		1/4"
125	10	178	126	153	421	474	713	325		1/4"
150	10	178	126	168	466	519	757	325		1/4"
200	10	184	126	199	565	618	957	325		3/8"
250	10	225	197	234	626	749	1125	450		1/2"
300	10	257	197	272	739	837	1213	450		1/2"
350	10	257	350	297	842	942	1342	--		1/2"
400	10	279	350	330	993	1033	1483	--		3/4"
450	10	311	350	355	1019	1119	1619	--		3/4"
500	10	359	380	391	1156	1256	1806	--		3/4"
600	10	372	400	461	1338	1438	2088	--		1"
700	6	378	400	534	1425	1525	2440	--		1"
750	6	395	400	559	1520	1620	2555	--		1"
800	6	411	400	584	1615	1715	2665	--		1"
900	6	470	400	649	1823	1923	2823	--		1"
1000	4	534	440	699	1992	2092	3192	--		1"

HANDWHEEL WITH NON-RISING STEM

Suitable when no size limitations exist,

The definition variables are as follows:

B: Max. width of the valve (without actuator).

P: Max. height of the valve (without actuator).

OPTIONS:


- Square nuts.
- Locking devices.
- Extensions: stand, pipe, plates..
- DN higher than those give in the table.

ACTUATOR INCLUDING:

- Handwheel
- Stem
- Nut.
- Guide bearings on the Yoke

AVAILABLE:

- DN50 to DN1000, other DN on request.
- From DN350 (included) the actuator is with geared mot
- Other pressures on request (ΔP)

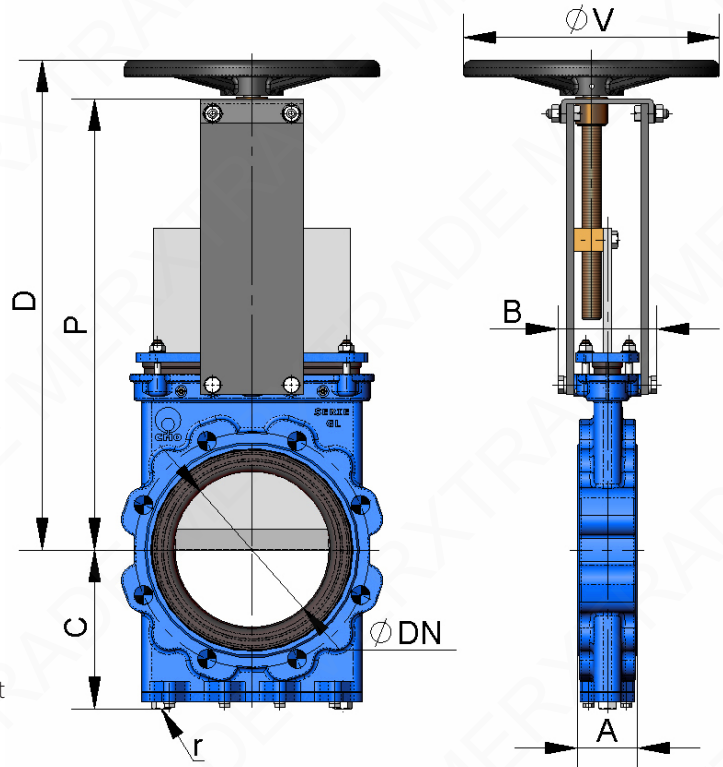

DN	ΔP (Kg/cm ²)	A	B	C	P	D	HV	ØV	(Kg.)
50	10	175	109	106	280	319	449	1/4"	7
65	10	175	109	113	306	345	500	1/4"	8
80	10	175	109	122	332	372	551	1/4"	9
100	10	175	109	136	368	407	587	1/4"	11
125	10	178	126	153	421	474	713	1/4"	13
150	10	178	126	168	466	519	757	1/4"	17
200	8	184	126	199	565	618	957	3/8"	28
250	6	225	197	234	626	749	1125	1/2"	40
300	6	257	197	272	739	837	1213	1/2"	56
350	5	257	350	297	842	942	1342	1/4"	94
400	5	279	350	330	993	1033	1483	3/4"	116
450	3	311	350	355	1019	1119	1619	3/4"	162
500	3	359	380	391	1156	1256	1806	3/4"	191
600	3	372	400	461	1338	1438	2088	1"	264
700	2	378	400	534	1425	1525	2440	1"	441
800	2	395	400	584	1615	1715	2665	1"	568
900	2	411	400	649	1823	1923	2823	1"	736
1000	2	470	400	699	1992	2092	3192	1"	921

CHAINWHEEL

Widely used in raised installations with difficult access, the handwheel is fitted in vertical position

The definition variables are as follows:

B = Max. width of the valve (without actuator).

P = Max. height of the valve (without actuator).

OPTIONS:

- Locking devices
- Extensions: stand, pipe, plates...
- Non-rising stem.
- DN higher than those give in the table.


INCLUDING:

- Handwheel
- Stem
- Nut
- Hood

AVAILABLE:

- Standard DN50 a DN1000.
- Other DN on request.

- From DN350 (included) the actuator is with geared motor.
- Other pressures on request (ΔP)

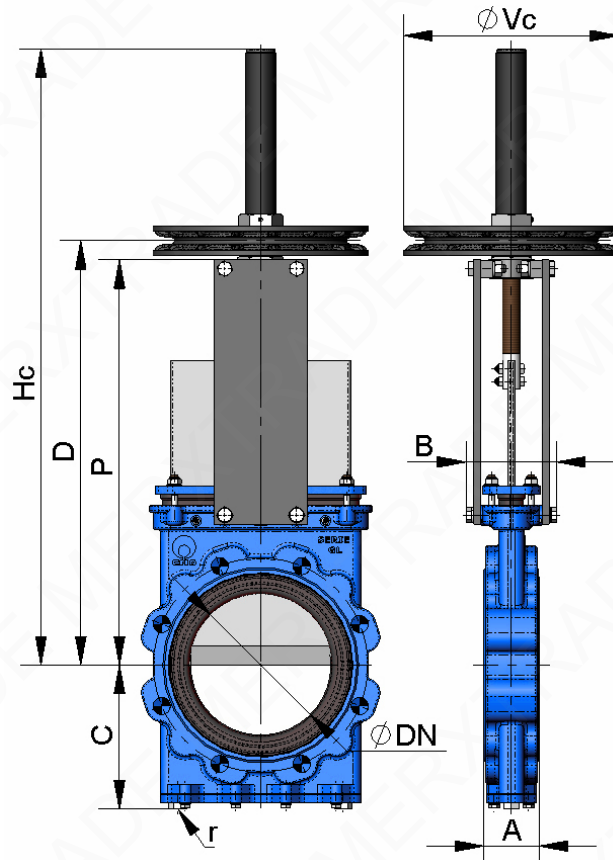

DN	ΔP (Kg/cm ²)	A	B	C	D	HC	ϕV	Peso(Kg.)	r (B.S.P.)
50	10	175	109	106	280	319	449	225	1/4"
65	10	175	109	113	306	345	500	225	1/4"
80	10	175	109	122	332	372	551	225	1/4"
100	10	175	109	136	368	407	587	225	1/4"
125	10	178	126	153	421	474	713	300	1/4"
150	10	178	126	168	466	519	757	300	1/4"
200	10	184	126	199	565	618	957	300	3/8"
250	10	225	197	234	626	749	1125	402	1/2"
300	10	257	197	272	739	837	1213	402	1/2"
350	10	257	350	297	842	942	1342	402*	1/4"
400	10	279	350	330	993	1033	1483	402*	3/4"
450	10	311	350	355	1019	1119	1619	402*	3/4"
500	10	359	380	391	1156	1256	1806	402*	3/4"
600	10	372	400	461	1338	1438	2088	402*	1"
700	6	378	400	534	1425	1525	2440	402*	1"
800	6	395	400	584	1520	1620	2555	402*	1"
900	6	411	400	649	1615	1715	2665	402*	1"
1000	6	470	400	699	1823	1923	2823	402*	1"

LEVER

It is a fast actuator.

The definition variables are as follows:

B = Max. width of the valve (without actuator).


P = Max. height of the valve (without actuator).

ACTUATOR INCLUDING:

- Level
- Rod
- Guide Bearing
- External limiting switches to maintain the position

AVAILABLE:

- DN50 a DN200
 - Other ND on request.
 - Other pressures on request
- * Drive designed to maneuver to 2 Kg/cm² of differential pressure (ΔP)

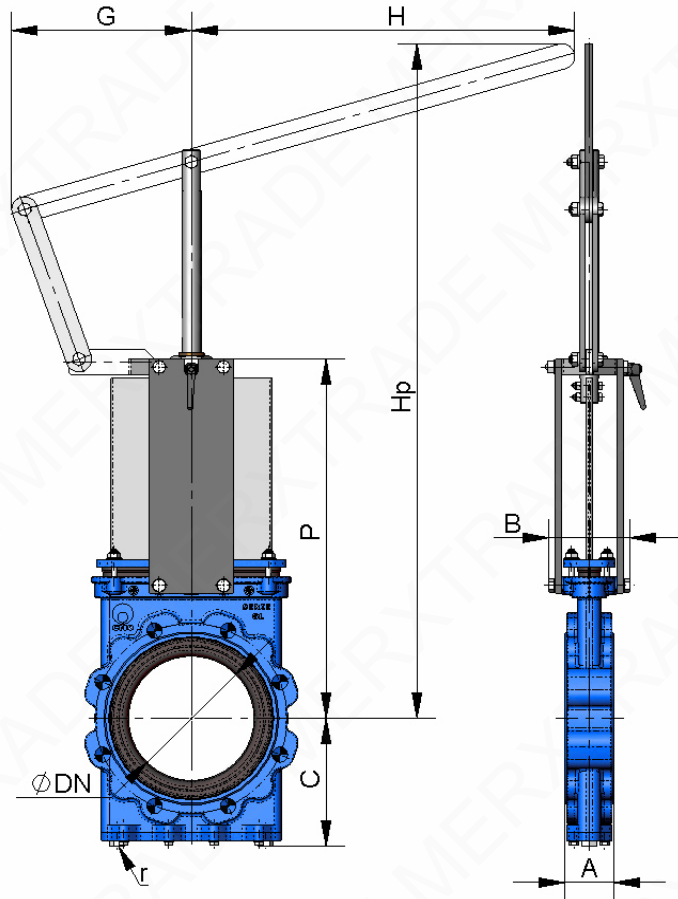

DN	ΔP (Kg/cm ²)	A	B	C	P	G	H	HP	r (B.S.P.)
50	10*	175	109	106	280	155	325	543	1/4"
65	10*	175	109	113	306	155	325	564	1/4"
80	10*	175	109	122	332	155	325	587	1/4"
100	10*	175	109	136	368	155	325	639	1/4"
125	10*	178	126	153	421	155	425	942	1/4"
150	10*	178	126	168	466	155	425	1002	1/4"
200	10*	184	126	199	565	290	620	1068	3/8"

GEAR BOX

It is recommendable for DN greater than 350

The definition variables are as follows:

B = Max. width of the valve (without actuator).

P = Max. height of the valve (without actuator).

OPTIONS:

- Chainwheel.
- Locking devices.
- Extensions: stand, pipe, plates...
- Non.rising stem.


ACTUATOR INCLUDING:

- Stem
- Yoke
- Handwhell
- Cone-shaped gear box

Standard ratio = 4 to 1

AVAILABLE:

- DN50 a DN1400, otros DN bajo consulta.
- other DN on request.
- Other pressures on request

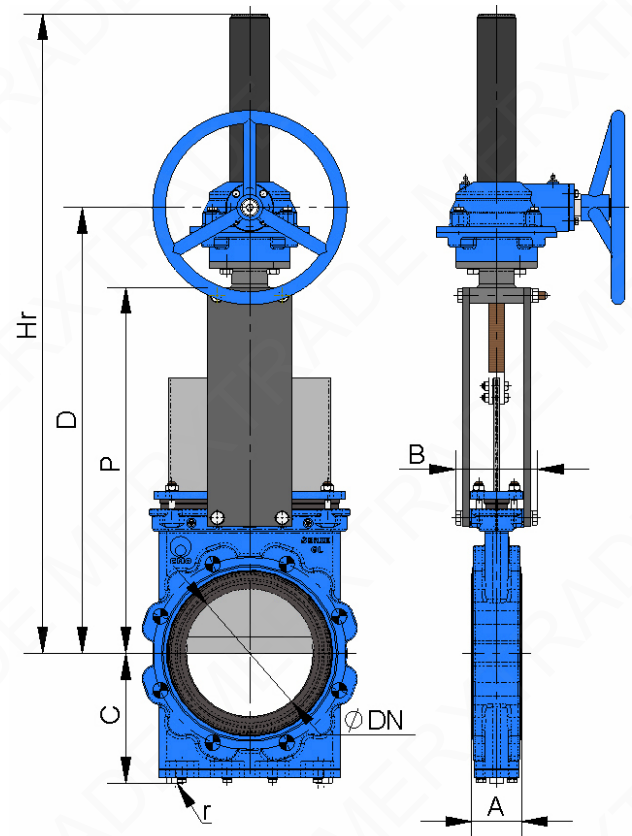

DN	ΔP (Kg/cm ²)	A	B	C	P	D	HR	r (B.S.P.)
50	10	175	109	106	280	402	449	1/4"
65	10	175	109	113	306	446	500	1/4"
80	10	175	109	122	332	454	551	1/4"
100	10	175	109	136	368	490	587	1/4"
125	10	178	126	153	421	565	713	1/4"
150	10	178	126	168	466	589	757	1/4"
200	10	184	126	199	565	689	957	3/8"
250	10	225	197	234	626	735	1125	1/2"
300	10	257	197	272	739	833	1213	1/2"
350	10	257	350	297	842	935	1342	1/4"
400	10	279	350	330	993	1019	1483	3/4"
450	10	311	350	355	1019	1120	1619	3/4"
500	10	359	380	391	1156	1275	1806	3/4"
600	10	372	400	461	1338	1457	2088	1"
700	6	378	400	534	1530	1764	2440	1"
750	6	395	400	559	1637	1860	2555	1"
800	6	411	400	584	1733	1950	2807	1"
900	6	470	400	649	1954	2090	3148	1"
1000	4	534	440	699	2160	2233	3579	1"
1100	4	534	440	730	2310	2446	3779	1 1/2 "
1200	4	537	480	775	2551	2522	3807	1 1/2 "

DOUBLE-ACTING PNEUMATIC CYLINDER

The definition variables are as follows:

B = Max. width of the valve (without actuator).

P = Max. height of the valve (without actuator).

AVAILABLE:


- DN50 a DN700, otros DN bajo consulta.
- Other DN on request.

The air supply pressure to the cylinder is a minimum of 6 Kg/cm² and a maximum of 10 Kg/cm², the air must be dry and lubricated.

For DN50 to DN200 valves, the cylinder's jacket and covers are made of aluminium, the rod of AISI304, the piston of rubber-coated steel and the O-ring seals are made of nitrile.

For pneumatic cylinders larger than Ø200 the covers are made of nodular cast iron or carbon steel.

On request, we can also supply the actuator made entirely of stainless steel, especially for installation in corrosive atmospheres.

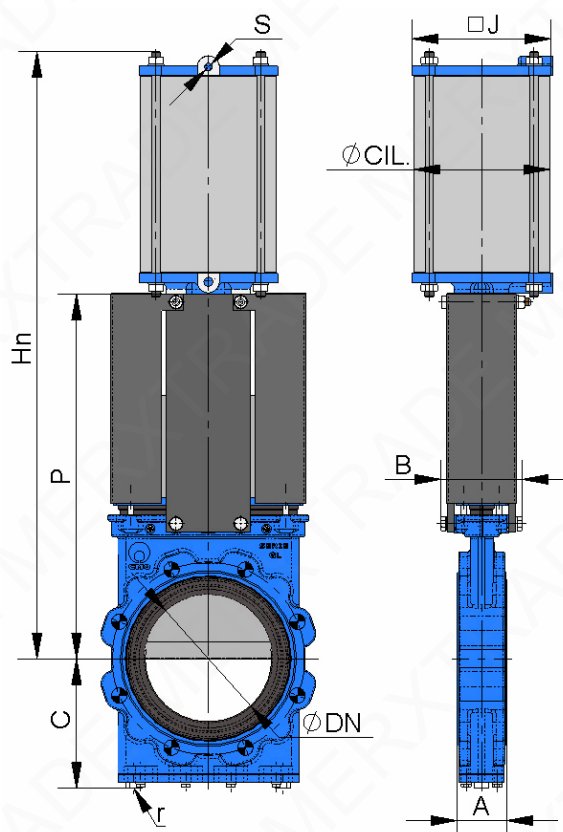

DN	ΔP (Kg/cm ²)	A	B	C	P	HN	J	ø CIL	ø VAST	s (B.S.P.)	r (B.S.P.)
50	10	175	109	106	280	475	96	80	20	1/4"	1/4"
65	10	175	109	113	306	515	96	80	20	1/4"	1/4"
80	10	175	109	122	332	555	115	100	20	1/4"	1/4"
100	10	175	109	136	368	620	138	125	25	1/4"	1/4"
125	10	178	126	153	421	700	175	160	30	1/4"	1/4"
150	10	178	126	168	466	775	175	160	30	1/4"	1/4"
200	10	184	126	199	565	940	218	200	30	3/8"	3/8"
250	10	225	197	234	626	1140	270	250	40	3/8"	1/2"
300	10	257	197	272	739	1300	382	300	45	1/2"	1/2"
350	10	257	350	297	842	1425	444	350	45	1/2"	1/2"
400	10	279	350	330	993	1655	508	400	50	3/4"	3/4"
450	10	311	350	355	1019	1805	552	450	50	3/4"	3/4"
500	10	359	380	391	1156	2000	612"	500	50	3/4"	3/4"
600	10	372	400	461	1338	2085	772	585	60	1"	1"
700	6	378	400	534	1530	2495	772	635	60	1"	1"

(*) -> For lower working pressures consult Ø cylinder.

SINGLE-ACTING PNEUMATIC CYLINDER

The definition variables are as follows:

B = Max. width of the valve (without actuator).

P = Max. height of the valve (without actuator).

AVAILABLE:


- DN50 a DN200.
- Other DN on request.

The air supply pressure to the cylinder is a minimum of 6 Kg/cm² and a maximum of 10 Kg/cm², the air must be dry and lubricated.

Available for opening or closing in case of air supply failure (spring opening or closing).

The jacket is made of aluminium, the covers of nodular cast iron or carbon steel, the rod of AISI304, the piston of rubber-coated steel, the O-ring seals of nitrile and the spring is made of steel.

The **actuator** design is **spring** activated for valves with diameters **up to DN200**. For larger diameters the actuator contains a double-acting cylinder and an air tank which stores the volume of air necessary to perform the last movement in the event of a air supply failure.

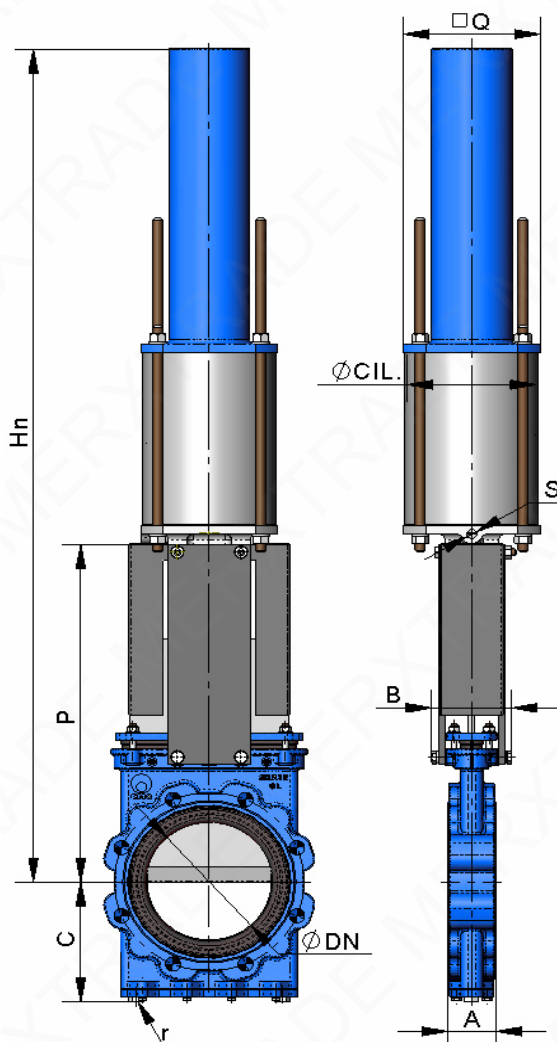

DN	ΔP (Kg/cm ²)	A	B	C	P	HN	J	ø CIL	øVAST	s (B.S.P.)	r (B.S.P.)
50	10	175	109	106	280	752	138	125	25	1/4"	1/4"
65	10	175	109	113	306	794	138	125	25	1/4"	1/4"
80	10	175	109	122	332	836	138	125	25	1/4"	1/4"
100	10	175	109	136	368	906	175	160	30	1/4"	1/4"
125	10	178	126	153	421	986	218	200	30	1/4"	1/4"
150	10	178	126	168	466	1056	218	200	30	1/4"	1/4"
200	10	184	126	199	565	1439	270	250	40	3/8"	3/8"


ELECTRIC ACTUATOR

This actuator is automatic and includes the following parts:

- Electric motor.
- Stem
- Yoke

OPTIONS:

- Different types and brands.
- Non-rising stem.
- ISO 5210 / DIN 3338 Flanges
- Available: DN50 to DN1400
- O other DN on request.
- From DN350 (inclusive) the motor is assisted with a gear box.
- Other pressures on request (ΔP).

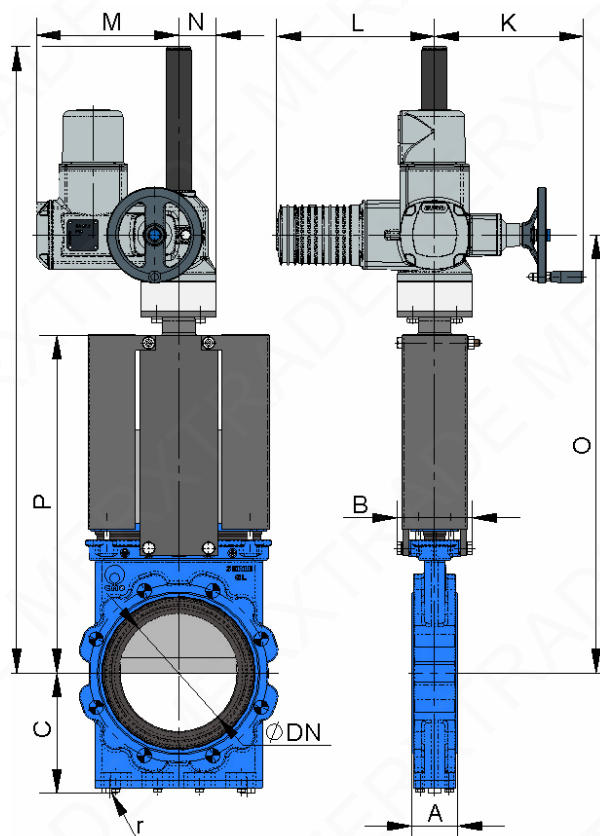

DN	ΔP (Kg/cm ²)	A	B	C	P	K	L	M	N	O	HE	r (B.S.P.)
50	10	54	109	106	280	249	265	238	62	436	631	1/4"
65	10	54	109	113	306	249	265	238	62	462	657	1/4"
80	10	57	109	122	332	249	265	238	62	488	683	1/4"
100	10	57	109	136	368	249	265	238	62	524	719	1/4"
125	10	64	126	153	421	249	265	238	62	574	769	1/4"
150	10	64	126	168	466	249	265	238	62	624	819	1/4"
200	10	76	126	199	565	249	265	238	62	723	1033	3/8"
250	10	76	197	234	626	254	283	248	65	781	1121	1/2"
300	10	83	197	272	739	254	283	248	65	879	1219	1/2"
350	10	83	350	297	842	249	265	407	82	975	1384	1/2"
400	10	96	350	330	933	254	283	424	82	1078	1627	3/4"
450	10	96	350	355	1019	254	283	424	82	1170	1719	3/4"
500	10	121	380	391	1156	336	389	479	103	1338	1889	3/4"
600	10	121	400	461	1338	336	389	479	103	1520	2171	1"
700	6	182	400	534	1530	336	389	479	103	1831	2440	1"
750	6	188	400	559	1637	336	389	479	103	1927	2555	1"
800	6	206	400	584	1733	339	389	528	136	2017	2807	1"
900	6	225	400	649	1954	339	389	528	136	2157	3148	1"
1000	4	240	440	699	2160	339	389	528	136	2300	3579	1"
1100	4	240	440	730	2310	339	389	528	136	2513	3779	1" 1/2"
1200	4	254	480	775	2551	336	389	659	170	2589	3807	1" 1/2"
1300	4	254	480	805	2882	336	389	659	170	3120	4482	1" 1/2"
1400	4	279	520	875	3250	336	389	659	170	3525	4952	1" 1/2"
1500	4	279	520	925	3695	336	389	659	170	3975	5464	1" 1/2"

HYDRAULIC ACTUATOR (Oil pressure: 135 Kg/cm²)

The definition variables are as follows:

B = Max. width of the valve (without actuator).


P = Max. height of the valve (without actuator).

The hydraulic actuator includes:

- Hydraulic cylinder
- Yoke

Options:

- Disponible: DN 50 a DN 1400
- Different types and brands available according to customer's requirements.
- Other pressures on request (ΔP).

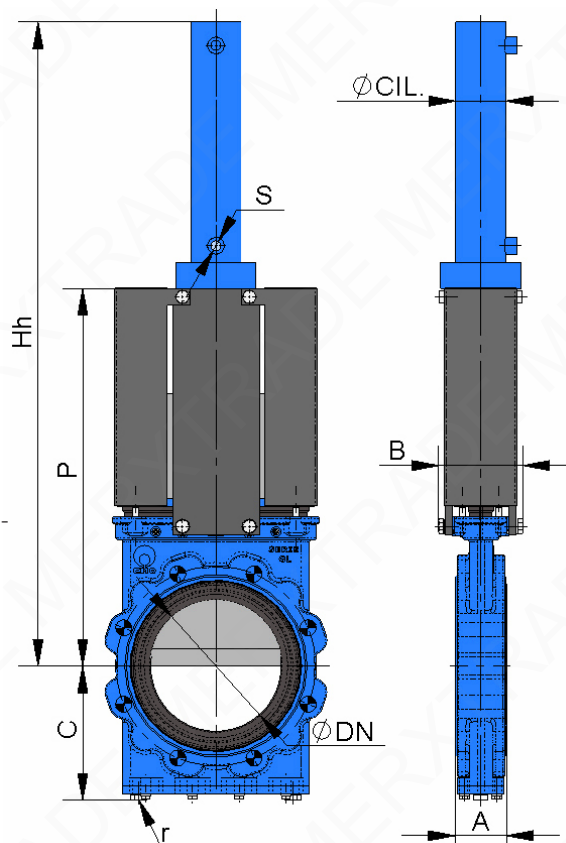


DN	ΔP (Kg/cm ²)	A	B	C	P	Hh	$\varnothing CIL.$	$\varnothing VAST$	S (B.S.P.)	Oil (dm ³)	r (B.S.P.)
50	10	175	109	106	280	482	25	18	3/8"	0,04	1/4"
65	10	175	109	113	306	524	25	18	3/8"	0,05	1/4"
80	10	175	109	122	332	566	25	18	3/8"	0,05	1/4"
100	10	175	109	136	368	615	32	22	3/8"	0,11	1/4"
125	10	178	126	153	421	702	40	28	3/8"	0,19	1/4"
150	10	178	126	168	466	789	50	28	3/8"	0,36	1/4"
200	10	184	126	199	565	958	50	28	3/8"	0,47	3/8"
250	10	225	197	234	626	1100	63	36	3/8"	0,91	1/2"
300	10	257	197	272	739	1272	80	36	3/8"	1,73	1/2"
350	10	257	350	297	842	1441	100	45	1/2"	3,1	1/2"
400	10	279	350	330	933	1613	125	56	1/2"	5,55	3/4"
450	10	311	350	355	1019	1766	125	56	1/2"	6,22	3/4"
500	10	359	380	391	1156	1939	125	56	1/2"	6,99	3/4"
600	10	372	400	461	1338	2273	160	70	1/2"	12,57	1"
700	6	378	400	534	1530	2410	160	70	1/2"	14,58	1"
750	6	395	400	559	1637	2576	160	70	1/2"	15,58	1"
800	6	411	400	584	1733	2742	160	70	1/2"	16,69	1"
900	6	470	400	649	1954	3053	200	90	1/2"	29,22	1"
1000	4	534	440	699	2160	3322	160	70	1/2"	20,81	1"
1100	4	534	440	730	2310	3685	200	90	1/2"	35,66	1" 1/2"
1200	4	537	480	775	2551	3919	200	90	1/2"	38,96	1" 1/2"
1300	4	537	480	805	2882	4565	200	90	1/2"	42,1	1" 1/2"
1400	4	533	520	875	3250	5035	220	90	1/2"	55,12	1" 1/2"
1500	4	533	520	925	3695	5545	220	90	1/2"	58,92	1" 1/2"

INFORMATION ON FLANGE DIMENSIONS


DN	ΔP (Kg/cm ²)	A	B	C	P
50	10	175	109	106	280
65	10	175	109	113	306
80	10	175	109	122	332
100	10	175	109	136	368
125	10	178	126	153	421
150	10	178	126	168	466
200	10	184	126	199	565
250	10	225	197	234	626
300	10	257	197	272	739
350	10	257	350	297	842
400	10	279	350	330	933
450	10	311	350	355	1019
500	10	359	380	391	1156
600	10	372	400	461	1338
700	6	378	400	534	1530
750	6	395	400	559	1637
800	6	411	400	584	1733
900	6	470	400	649	1954
1000	4	534	440	699	2160
1100	4	534	440	730	2310
1200	4	537	480	775	2551
1300	4	537	480	805	2882
1400	4	533	520	875	3250
1500	4	533	520	925	3695

EN 1092-2 PN10

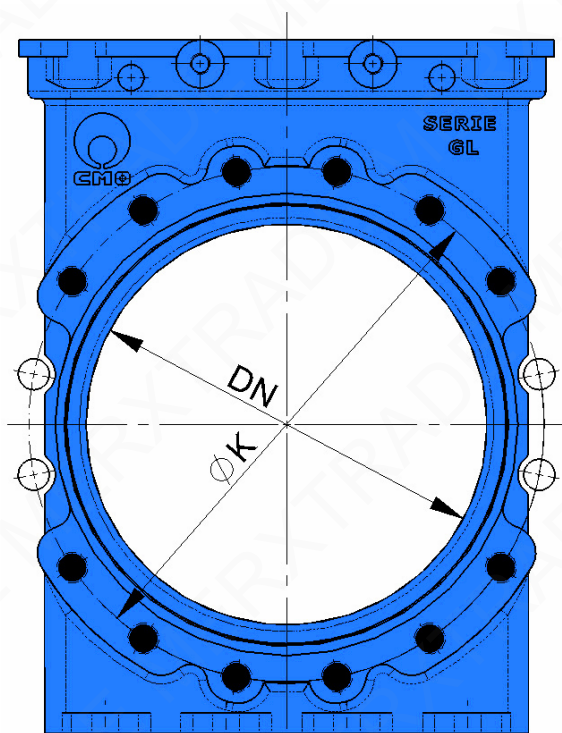


- BLIND TAPPED HOLE
- o THROUGH HOLE

ANSI B16, class 150

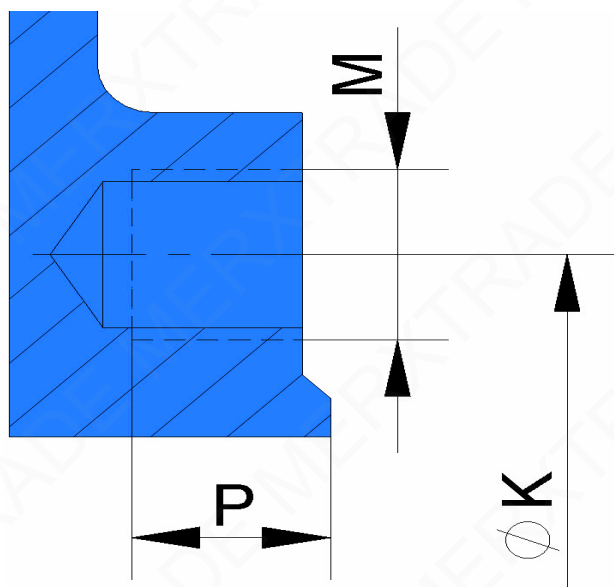


DN	ΔP (Kg/cm ²)	o	R UNC	P	ØK
2"	10	4	3/4"	1,28"	4,75"
2 1/2"	10	4	3/4"	1,28"	5,5"
3"	10	4	3/4"	1,28"	6"
4"	10	8	3/4"	1,28"	7,5"
5"	10	8	7/8"	1,28"	8,5"
6"	10	8	7/8"	1,28"	9,5"
8"	10	8	7/8"	1,32"	11,75"
10"	10	12	1"	1,4"	14,25"
12"	10	12	1"	1,48"	17"
14"	10	12	1 1/8"	1,48"	18,75"
16"	10	16	1 1/8"	1,64"	21,25"
18"	10	16	1 1/4"	1,8"	22,75"
20"	10	20	1 1/4"	1,84"	25"
24"	10	20	1 3/8"	1,96"	29,5"
28"	6	28	1 3/8"	2,24"	34"
30"	6	28	1 3/8"	2,32"	36"
32"	6	28	1 5/8"	2,36"	38,5"
36"	6	32	1 5/8"	2,48"	42,75"
40"	6	36	1 5/8"	2,76"	47,25"

ESTANDAR VERSION

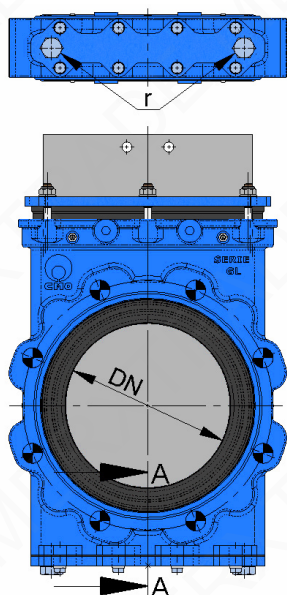


VERSION
ESTANDAR

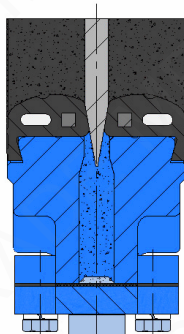


SECCIÓN A-A

DN	r (B.S.P.)
50	1/4"
65	1/4"
80	1/4"
100	1/4"
125	1/4"
150	1/4"
200	3/8"
250	1/2"
300	1/2"
350	1/2"
400	3/4"
450	3/4"
500	3/4"
600	1"

DN	ΔP (Kg/cm ²)
2"	10
2 1/2"	10
3"	10
4"	10
5"	10
6"	10
8"	10
10"	10
12"	10
14"	10
16"	10
18"	10
20"	10
24"	10
28"	6
30"	6
32"	6
36"	6
40"	6

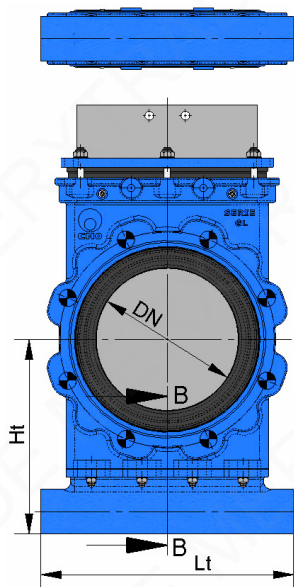



OPCION 1

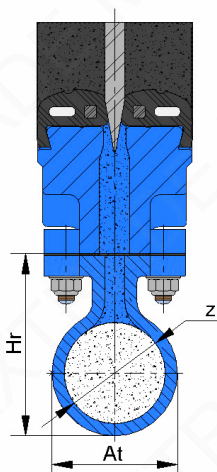


SECCIÓN B-B

DN	Ht	Lt	At	Hr	z (B.S.P.)
50	158	185	42	68	1"
65	168	200	42	68	1"
80	174	220	42	68	1"
100	188	240	42	68	1"
125	208	265	42	73	1"
150	223	290	42	73	1"
200	272	350	62	93	1 3/4"
250	310	400	62	98	1 3/4"
300	348	450	62	98	1 3/4"
350	373	520	62	98	1 3/4"
400	403	560	62	98	1 3/4"
450	428	610	62	98	1 3/4"
500	472	690	70	107	2"
600	542	790	70	107	2"


DN	Ht	Lt	Ht	z (B.S.P.)
50	158	185	68	1"
65	168	200	68	1"
80	174	220	68	1"
100	188	240	68	1"
125	208	265	73	1"
150	223	290	73	1"
200	272	350	93	1 3/4"
250	310	400	98	1 3/4"
300	348	450	98	1 3/4"
350	373	520	98	1 3/4"
400	403	560	98	1 3/4"
450	428	610	98	1 3/4"
500	472	690	107	2"
600	542	790	107	2"

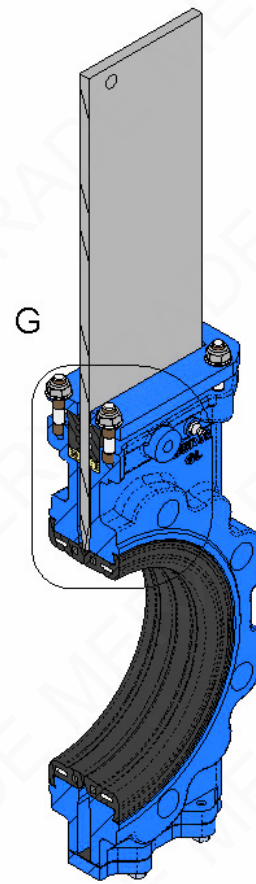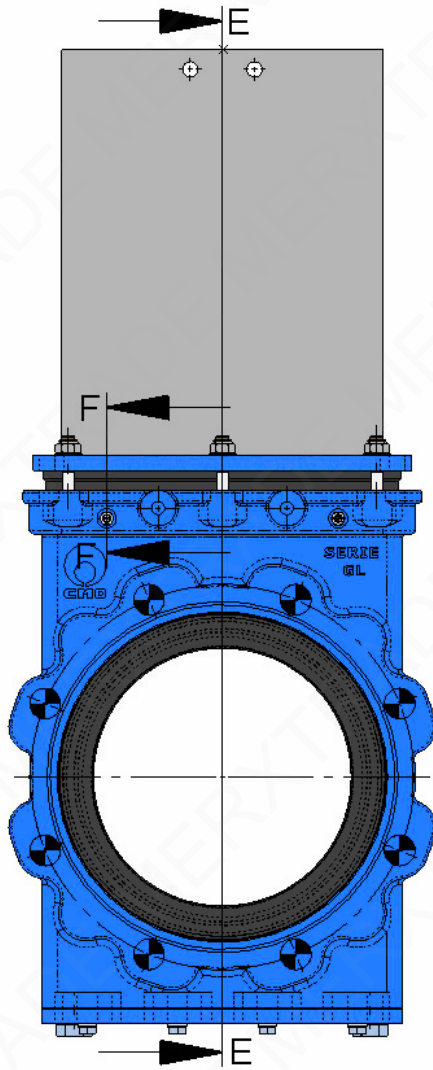

SECCIÓN E-E

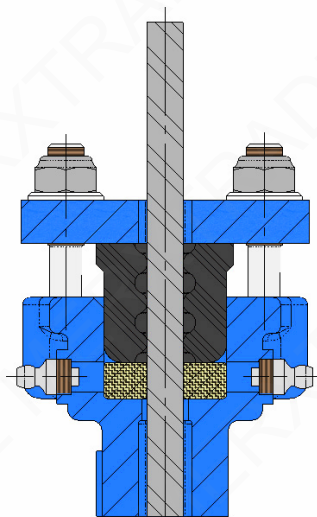

SECCIÓN F-F

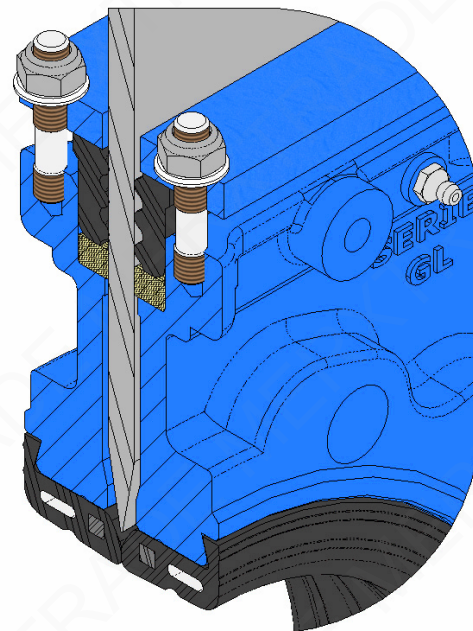

DETALLE G